




Tight version



Supply point product

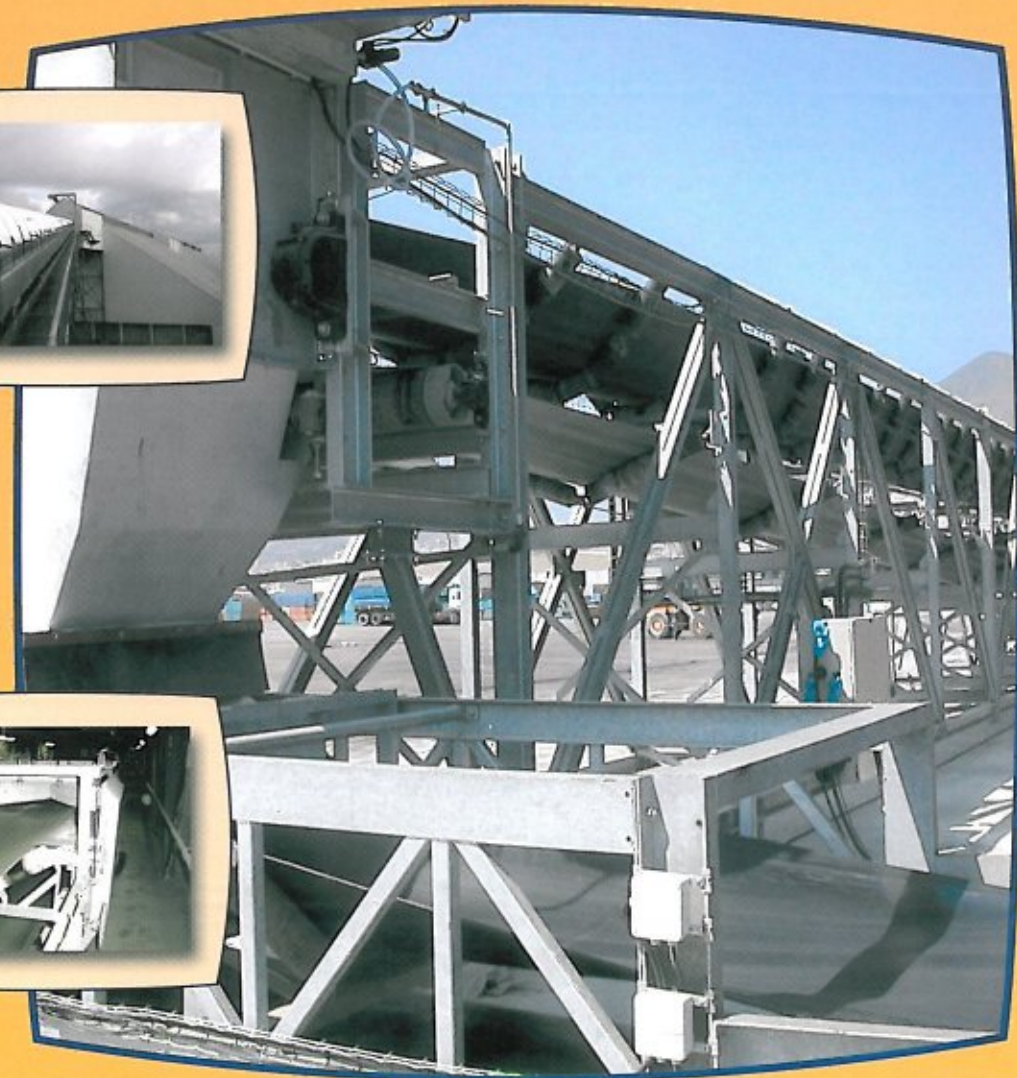

Harbour handling



Flow guide

BELT CONVEYOR

USE

- Powders and pellets conveying and extraction

TYPE

- Static
- Movable
- Swivelling

CONSTRUCTION

- Painted steel
- Hot dip galvanized steel
- Stainless steel

Capacity : up to 3000 m³/hour
Width of belt : from 400 up to 2000 mm

GENERAL INFORMATION

- Drum and belt scraper
- Dust filter unit
- Magnetic protection
- Belt tension ensured by screw or counterbalance
- All types of belts and rollers according to the application
- Mobile pouring trolley with 1 or 2 outlets, dust filter optional
- Movable baffle with 1 or 2 product diversion points

OPTIONAL

- Weather proofing

SAFETY DEVICES

- Rotation control, product blockage control, belt alignment control, product flow control
- Emergency stop cable

ATEX certified version on request

