


Explosion vent relief



Optimized draining foot

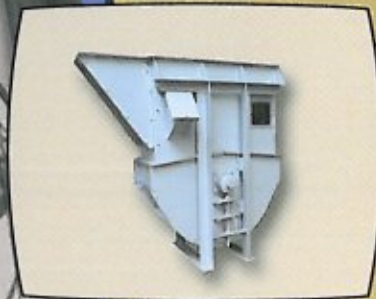

Oil operated tension



Elevator foot integral cleaning



BUCKETS ELEVATOR

USE

- Powder and pellets vertical handling

TYPE

- Chain or rubber belt
- Special fragile products low speed

CONSTRUCTION

- Painted steel
- Hot dip galvanized steel
- Stainless steel

Capacity : up to 2000 m³/hour
Working width from 200 up to 1650 mm

GENERAL INFORMATION

- Anti wear ejecting head protection
- Flexible adjustable output device
- Optimized discharging elevator foot - option
- Removable elevator legs
- All kind of buckets and belts according materials
- Vacuum connection or dustfilter - option
- Step by step operating for easy maintenance - option

OPTIONAL

- Additional feeding device

SAFETY DEVICES

- Rotation, belt skidding, product jams control sensors

ATEX certified version on request

