



Different types of chain

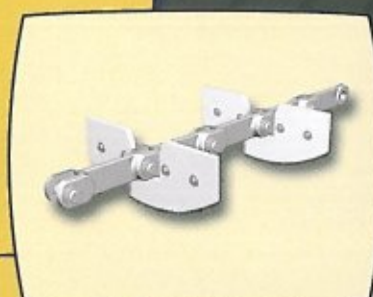

Through chain

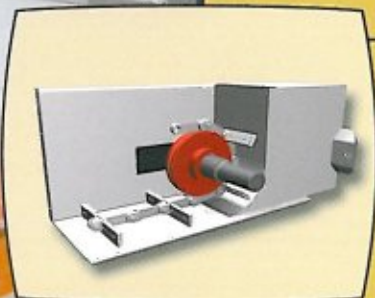

Non residues head



Removable transmission sprocket

CHAIN CONVEYOR

USE

- Powder and pellets conveying and extraction

TYPE

- Single or double ways
- Throughchain or flat bottom body conveyors
- Back and forth shuttle

CONSTRUCTION

- Coated mild steel
- Hot galvanized steel
- Stainless steel

Capacity : up to 1600 m³/hour
Working width from 200 up to 2000 mm

GENERAL INFORMATION

- Round shape to minimize residues
- Better discharging through transmission wheel positioning adjustment
- Side polyurethane self-cleaning arms
- High Density polyethylene return guides to minimize sound level
- Same chain type suitable to different width chain conveyors

OPTIONAL

- Non residues specific hatches
- Chain cleaning brushes
- Double level or buckets product cleaning

SAFETY DEVICES

- Rotation, product jam sensors

ATEX certified version on request

